





DESIGN FEATURES & BENEFITS

- + 0.7mm thickness reduced bending and increased durability
- + Bright annealed finish allows for better evaluation of CIP response
- + Improved inlet design ideal for viscous products
- + Enlarged hanger allows plates to slide smoothly during installation or inspection
- + Snap-in gasket provides secure gasket attachment

AGC ADVANTAGES

- + Pro8[™] has existing AGC ProFlow design features & improved thermal performance
- + For new AGC frames and upgrade for Clip8, Front8 and C8 frames without piping changes
- + Plates packed in order per streaming diagram
- + In stock and ready to ship minimal lead time
- + Onsite installation service available

BUILDING THE BEST. SERVICING THE REST.



WESTERN 3109 NE 230th Avenue Fairview, OR 97024 +1.503.774.7342 +1.800.715.8820 FAX +1.503.774.2550

MIDWEST

8400 Lakeview Parkway Suite 700 Pleasant Prairie, WI 53158 +1.847.301.6890 +1.888.489.8820

EASTERN

10129 Piper Lane Bristow, VA 20136 +1.703.257.1660 +1.800.825.8820 FAX +1.703.330.7940


See us on the web at www.AGCHeatTransfer.com



AGC Pro8[™] enlarged hanger allows plates to slide smoothly during installation or inspection




Snap-in gasket provides secure gasket attachment

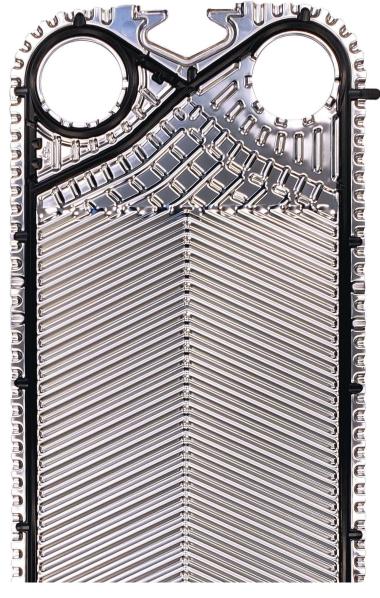



PR08

AGC Pro8™ enlarged opening provides lower pressure drop in the port inlet



Metal to metal alignment device and reinforced side band

ASK ABOUT OUR PRO8™ TIE-BOLT AND TWIN SPINDLE AUTO CLOSE FRAMES!

GENERAL INFORMATION

Plate & Gasket WeightStainless Steel 5.9lbs / 2.63 kg
Hastelloy 5.8 lbs / 2.63 kgHeat Transfer Area4.1ft² / 0.38m²Plate Thickness0.7mm Stainless Steel
0.6mm HastelloyVolume (per channel)0.38 gallons / 1.4LGasket OptionsNitrile (NBR), EPDM





